


## FLUSH MOUNTED ACCESS PANELS

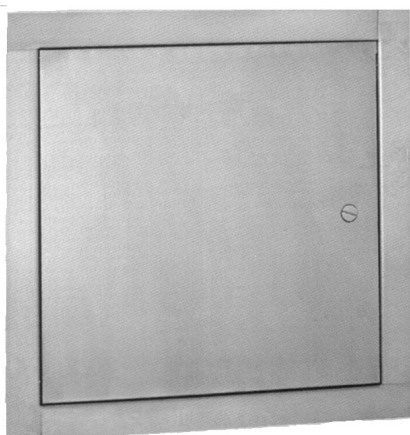

Series **WMT** all-purpose steel access panels provide fast and convenient access for inspection or service to vital components of fire sprinkler, plumbing, heating, air conditioning and electrical systems. The **WMT** series is used primarily for new installations or remodeling on masonry tile, wood or other surfaces.

### STANDARD EQUIPMENT:

- \* 16 Gauge steel door
- \* 16 Gauge steel frame with 1" flange
- \* Reinforced concealed hinge
- \* Phosphate dipped steel with prime coat
- \* Screwdriver operated cam locks

### OPTIONAL:

- \* 18 gauge stainless steel Add suffix **S** to Figure No.
- \* Special paint
- \* Key operated cylinder lock or a cam lock
- \* Surface mounted

### WMT SERIES

FIGURE NO.	FLUSH MOUNTED ACCESS PANELS NO. WMT						
	SIZE W H	OUTSIDE FRAME DIM. W H		WALL OPENING REQUIRED WIDTH HEIGHT		SHIPPING WEIGHT	LATCHES
WMT1850	6X6	8	8	6 3/8	6 3/8	4	1
WMT1851	8X8	10	10	8 3/8	8 3/8	4	1
WMT1852	8X12	10	14	8 3/8	12 3/8	6	1
WMT1853	10X10	12	12	10 3/8	10 3/8	6	1
WMT1854	12X12	14	14	12 3/8	12 3/8	7	1
WMT1855	12X16	14	18	12 3/8	16 3/8	9	1
WMT1856	12X18	14	20	12 3/8	18 3/8	10	1
WMT1857	12X24	14	26	12 3/8	24 3/8	12	2
WMT1858	14X14	16	16	14 3/8	14 3/8	9	1
WMT1859	16X16	18	18	16 3/8	16 3/8	11	1
WMT1860	16X20	18	22	16 3/8	20 3/8	13	1
WMT1861	18X18	20	20	18 3/8	18 3/8	12	1
WMT1862	20X24	22	26	20 3/8	24 3/8	15	2
WMT1863	20X30	22	32	20 3/8	30 3/8	20	4
WMT1864	22X30	24	32	22 3/8	30 3/8	22	4
WMT1865	24X24	26	26	24 3/8	24 3/8	18	4
WMT1866	24X30	26	32	24 3/8	30 3/8	22	5
WMT1867	24X36	26	38	24 3/8	36 3/8	25	5
WMT1868	30X30	32	32	30 3/8	30 3/8	30	5
WMT1869	36X36	38	38	36 3/8	36 3/8	41	5