


**"PRESSUR-MASTER"
FIELD ADJUSTABLE
AUTOMATIC PRESSURE REGULATING VALVES**

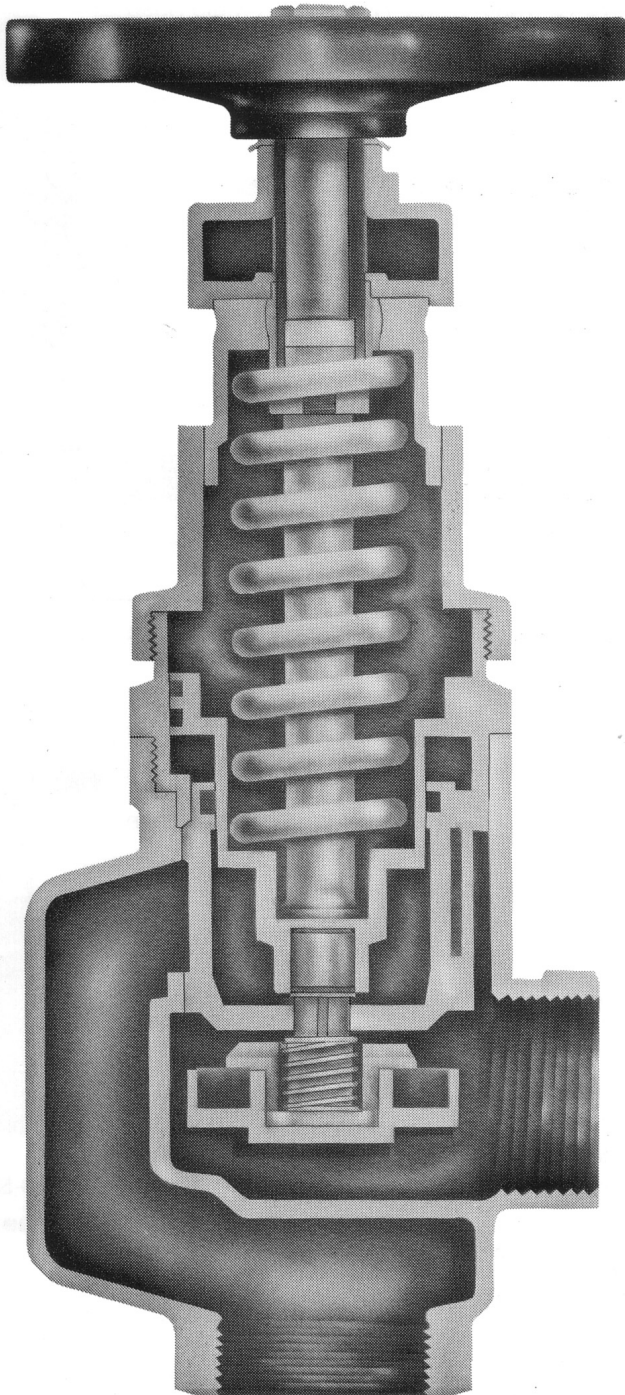

Underwriters Laboratory Listed at 400 PSI

Underwriters Laboratory Listed as a Checking Device

City of Seattle Approved.

Regulates pressure under flow (residual) and no-flow (static) conditions.

Tamper resistant setting.

For use with standpipe and/or automatic sprinkler systems.

Available with switch bracket for mounting supervisory switch.

Equipped with four ports drilled, tapped and plugged.

Equipped with visual indicator for on-off inspection.

Available angle or inline (straight) body style.

Constant static outlet regardless of static inlet (provided inlet PSI is higher than desired outlet)

Available in 2 1/2" size.

Setting values engraved in upper stem.

Each valve equipped with setting-rod and flow chart.


Directional flow arrow.

Outlet settings from 60 PSI to 175 PSI.

Available Grooved X Grooved.

"PRESSUR-MASTER" AUTOMATIC PRESSURE REGULATING VALVES

**2 1/2" FEMALE X MALE
ANGLE TYPE**



400LB. Field adjustable pressure regulating valve for use as a hose outlet valve where inlet pressures require regulation.

STANDARD EQUIPMENT: Cast Brass valve with Female NPT inlet X Male Hose thread outlet. Visual indicator. Four ports drilled, tapped and plugged. Red wheel handle.

OPTIONAL FINISHES:

- RC - Rough Chrome Plated
- MSB - Monitor Switch Bracket

**SPECIFY
THREAD**

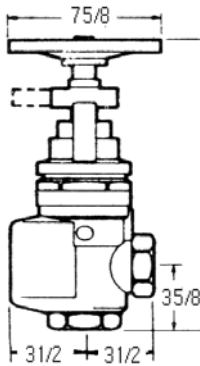


Figure No. 5610

U/L LISTED

"PRESSUR-MASTER" AUTOMATIC PRESSURE REGULATING VALVES

**2 1/2" FEMALE X FEMALE
2 1/2" GROOVED X GROOVED
ANGLE TYPE**



400 LB. Field adjustable automatic pressure regulating valve for use as a fire hose rack assembly valve or sprinkler control valve where pressures require regulation.

STANDARD EQUIPMENT: Cast Brass valve with Female NPT inlet X Female thread outlet. Visual indicator. Four ports drilled, tapped and plugged. Red wheel handle.

OPTIONAL FINISHES:

- RC - Rough Chrome Plated



Figure No. 5647



Figure No. 5620


Fig No.

- 5620 2 1/2" X 2 1/2" Angle
- 5625 2 1/2" X 2 1/2" Angle with bracket
- 5627 2 1/2" X 2 1/2" Grooved X Grooved with bracket

U/L LISTED

"PRESSUR-MASTER" AUTOMATIC PRESSURE REGULATING VALVES

**2 1/2" FEMALE X FEMALE
2 1/2" GROOVED X GROOVED
INLINE TYPE**

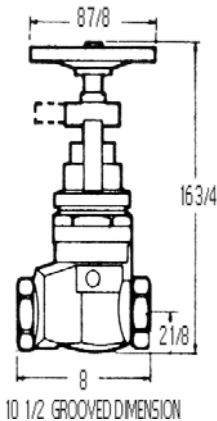

400LB. Field adjustable pressure regulating valve for use as a fire hose rack assembly valve or sprinkler control valve where pressure require regulation.

STANDARD EQUIPMENT: Cast Brass valve with Female NPT inlet and Female NPT outlet. Visual indicator. Four ports drilled, tapped and plugged. Red wheel handle.

OPTIONAL FINISHES:

- RC - Rough Chrome Plated



Figure No. 5647



Figure No. 5630

Fig No.

- 5630 2 1/2" X 2 1/2" Inline
- 5635 2 1/2" X 2 1/2" Inline with bracket
- 5637 2 1/2" X 2 1/2" Grooved X Grooved with bracket
- 5640 2 1/2" X 2 1/2" FE NPT X MA NST

U/L LISTED

5630 NYC APPROVED WITH CAPPED BONNET. BSA/MEA APPROVED.