

FIRE DEPARTMENT CONN. ACCESSORIES



Fig No. 6702-6706

OPEN ADAPTERS


Used to connect fire hose to Standpipe or Sprinkler Systems.

STANDARD EQUIPMENT: Cast Brass with size and type of inlet and outlet as selected by figure number. All exposed parts are polished brass. **SPECIFY THREAD.**

OPTIONAL FINISH: PC - Polished Chrome Plated



Fig No. 6710-6712

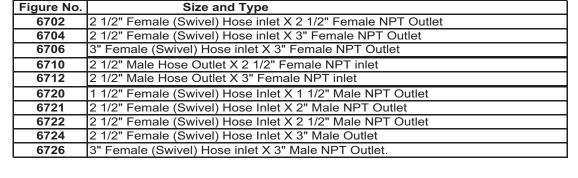



CHECK SNOOTS

Fig No. 6720-6726

Used to connect fire hose on multiple Inlet Fire Dept. connections. Checks excess back flow of water.

STANDARD EQUIPMENT: Cast brass with size and type of inlet and outlet, and

ide D

checking device as selected by figure number.

SPECIFY THREAD. OPTIONAL FINISH: PB - Polished Brass

PC - Polished Chrome Plated

	A.	
(mark)		

Fig No. 6730-6736

Fig No. 6738-6740

Spring Check Snoots		
Figure No.	Size and Type	
6730	2 1/2" Female (Swivel) Hose Inlet X 3" Female NPT Outlet	
6732	3" Female (Swivel) Hose Inlet X 3" Female NPT Outlet	
6734	2 1/2" Female (Swivel) Hose Inlet X 3" Male NPT Outlet	
6736	3" Female (Swivel) Hose Inlet X 3" Male NPT Outlet	
0730	o Tentale (Owiver) Flose Illiet A.5. Iviale NFT Outlet	

Clapper Snoots		
Figure No.	Size and Type	
6738	2 1/2" Female (Swivel) Hose Inlet X 3" Female NPT Outlet U/L LISTED	
6740	2 1/2" Female (Swivel) Hose Inlet X 3" Male NPT Outlet U/L LISTED	

PLUGS AND CHAINS



Used on Fire Dept. inlet connections. Prevents entry of foreign matter and protects female threads.

STANDARD EQUIPMENT: Cast pin lug with male hose thread and attached chain. Cast Iron and Cast Brass as selected by figure number. **SPECIFY THREAD AND COLOR OR FINISH.**

Fig No. 6745-6746

Cast Iron		
Figure No.	Size	
6745	2 1/2" (NYT or NST)	
6746	3" (NYT)	

FINISH: PAINTED

Red Green Yellow



Fig No. 6747

Cast Brass		
Figure No.	Size	
6744	1 1/2"	
6747	2 1/2"	
6748	3"	

OPTIONAL FINISHES:

PB- Polished Brass

RC- Rough Chrome Plated

PC- Polished Chrome Plated