

TWO-WAY CLAPPER INLET GROOVED

NEW ITEM



Figure No. 6010G-6012G

An Auxiliary Inlet Connection with 500 G.P.M. minimum inlet capacity. Used to supplement fire protection water supply. Flush design enhances appearance and provides unobstructed passage.

STANDARD EQUIPMENT: Cast brass grooved with two double clapper inlets, brass plate, adapters and plugs with chain. Select size and outlet connection by Figure Number.

SPECIFY THREAD AND BRANDING.

BRANDING: "Standpipe", "Auto Spkr", "Combination Standpipe and Sprinkler Systems", "Dry Standpipe". Special lettering available.

OPTIONAL FINISHES:

- PB - Polished Brass
- PC - Polished Chrome Plated



6010 Body Grooved

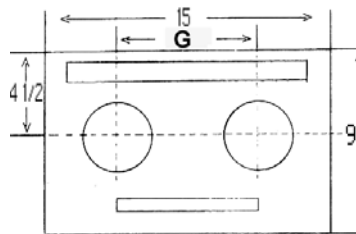


Diagram of Plate for 6010 Series



6011 & 6012 Body Grooved




Diagram of Back Body




Diagram of Bottom & Top Body

OUTLET LOCATIONS			DIMENSIONS				
BACK Fig. No.	BOTTOM Fig. No.	TOP Fig. No.		Size	A	B	C
6010G			4 X 2 1/2 X 2 1/2	10 1/2	7 3/8	7G	5 1/8
	6011G	6012G	4 X 2 1/2 X 2 1/2	11	7 1/8	7G	5.37